

1U KEYBOARD WITH SPEAKER



optional mouse shown



RMKS-140

- Compact 88 Key keyboard with mouse use and storage area in 1U of vertical 19" rack space.
- 24W Amplified stereo speaker integrated into front panel for ease of control access when closed in rack.
- Mounted with included smooth action ball bearing slides which lock in the extended position.
- Convenient area beside keyboard for easy mouse use, mouse stores behind keyboard.
- Retainer front panel option keeps unit contained in the rack when not in use.
- Overall depth 17.5" (14.5" keyboard depth + 3.0" cable management depth).
- Housed in rugged steel construction with a durable powder coat finish.
- Includes detachable cable management arm.

KEYBOARD SPECIFICATIONS


Rollover:	Alpha N-key rollover.
Auto repeat:	Yes.
Self Diagnostics:	At power on and system reset.
Data Buffer:	All codes buffered before sending.
Operating voltage:	+5 VDC +/- 5%.
Operating current:	300 mA.
Interface:	PS/2 or USB.
Reliability:	5 million cycle switch life.
Compatibility:	DOS, Windows 3.X, Windows 95/98 / NT, / 2000 / XP / Vista / 7.

SPEAKER SPECIFICATIONS

Power Supply:	110 VAC, 60 Hz Standard, 110/220 VAC, 50/60 Hz Optional.
Front Panel Controls:	Power ON/OFF switch, Volume Control, Headphone Jack, Power Indicator.
Audio Amplifier Output:	24 Watts.
Audio Input Connector:	1/8" (3.5mm) stereo jack.

MODEL NUMBER

RMKS-140(X)(X)(X)

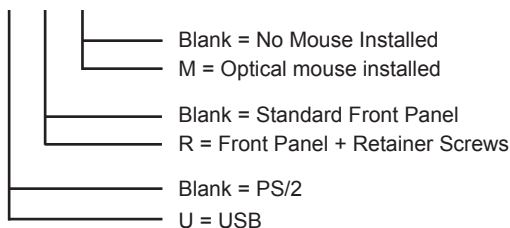

GENERAL SPECIFICATIONS

Dimensions:	19.0" (W) x 1.75" (H) x 17.50" (D)
Slide Adjustment:	18.0" to 22.0" Standard, 18.5" to 25.5" Optional.
Weight:	12 lbs
Temperature:	Operating: 0°C to 50°C Storage: -20°C to 60°C
Humidity:	Operating: 10 to 85% RH (max)
Colors Available:	Black.

Specifications subject to change without notice.

OEM and custom solutions. Contact us for additional information.

RECORTEC, INC.

www.recortec.com
sales@recortec.com

1-800-729-7654

1650-A Berryessa Rd Tel: 408-928-1480
San Jose, CA 95133 Fax: 408-928-1489