
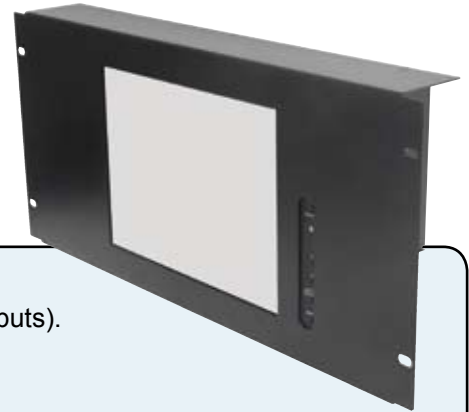


# 10.4" LCD RACK MOUNT MONITOR (5U)

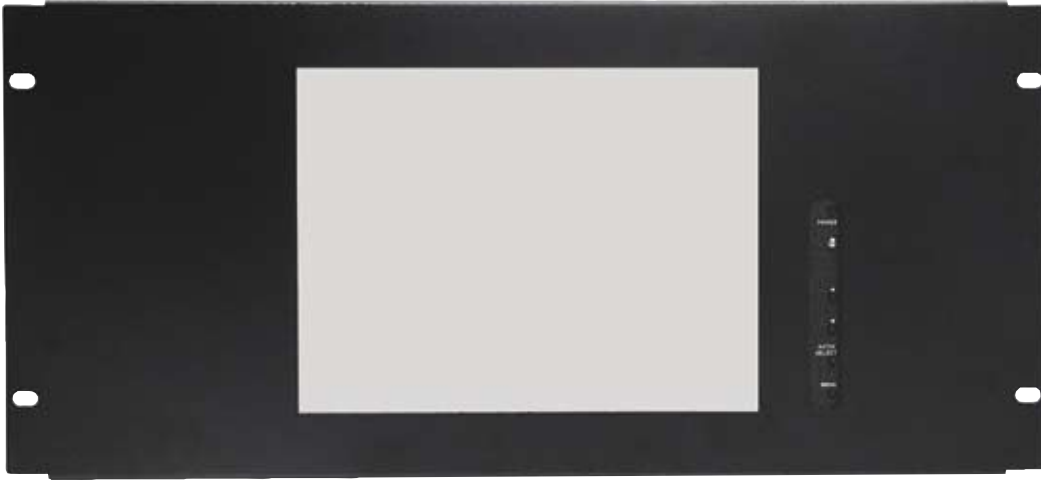

- 10.4" TFT LCD display (1024 x 768 resolution) in only 5U (8.75") of rack space.
- ARGB (Analog RGB) and DVI-D signal inputs (optional S-Video/Composite Video inputs).
- Housed in rugged steel construction with a black powder coat finish.
- Supplied with VGA cables, AC/DC adapter and power cord.
- Optional Lexan™ screen protection available (L).

## GENERAL SPECIFICATIONS

### Dimensions:

19.0" (W) x 8.75" (H) x 2.40" (D).

### Weight:

10 lbs

### Power:

110 - 240 VAC, 50/60 Hz.  
60 Watts max.

### On-Screen Controls:

Brightness, Contrast, Horizontal & Vertical  
Position, Auto Adjust, OSD H & V Position, Input Select  
Color Temp., Reset.

### Plug & Play:

DDC1 and DDC2B

### Temperature:

Operating: 0°C to 50°C  
Storage: -20°C to 60°C

### Humidity:

Operating: 10 to 90% RH (max)

### Input Signal (VGA):

R.G.B. analog video, TTL H & V sync.

### Input Signal (Digital):

DVI-D (TMDS).

### Input Connectors:

Analog: 15 pin mini D-Sub.  
Digital: 24 pin DVI-D.

### Colors Available:

Black.

Specifications subject to change without notice.

## DISPLAY SPECIFICATIONS (APPLY TO EACH DISPLAY)

### Display Type:

Active matrix TFT LCD

### Display area:

10.4" Diagonal.

### Colors Displayed:

262K colors.

### Contrast Ratio:

500:1 typ.

### Brightness:

350 cd/m<sup>2</sup> typ.

### Viewing Angle:

Horizontal: 178°  
Vertical: 178°

### Response Time:

40ms Typ.

### Resolution:

VGA up to 1024 x 768.

### Horizontal Frequency:

31.5 to 80KHz.

### Vertical Frequency:


56 to 75 Hz.

### Screen Protection:

Lexan™ optional.

## MODEL NUMBER

RMM-101(X)(X)

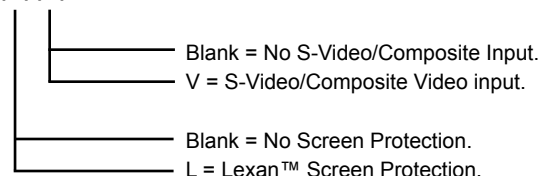

Contact us about other options and our additional rack mount products.



Tel: 408-928-1480  
web:www.recortec.com  
1620 Berryessa Road

**RECORTEC, INC.**  
**1-800-729-7654**

Fax: 408-729-3661  
email:sales@recortec.com  
San Jose, CA 95133