

# 1U 17" LCD RACK MOUNT MONITOR



- Mounted with included smooth action ball bearing slides which lock in the extended position.
- Monitor powers off preserving back light life when tilted down for sliding into the rack.
- Retainer and lock options to keep unit contained in the rack when not in use.
- Housed in rugged steel construction with a durable powder coat finish.
- Monitor surface protected by a clear unbreakable Lexan™ covering.

## GENERAL SPECIFICATIONS

### Dimensions:

19.0" (W) x 1.75" (H) x 19.0" (D)

### Weight:

27 lbs

### Power (TFT Display):

90 - 260 VAC, 50/60 Hz.  
60 Watts maximum

### On-Screen Controls:

Brightness, Contrast, Horizontal & Vertical  
Position, Auto Adjust, OSD H & V Position, Load  
and Save Values

### Plug & Play:

DDC1 and DDC2B

### Temperature:

Operating: 0°C to 50°C  
Storage: -20°C to 60°C

### Humidity:

Operating: 10 to 85% RH (max)

### Input Signal (VGA):

R.G.B. analog video, TTL H & V sync.

### Input Connector:

Display: 15-pin mini D-Shell

### Colors Available:

Choice of Black (B) or Light Gray.

Specifications subject to change without notice.

## DISPLAY SPECIFICATIONS

### Display Type:

Active matrix TFT LCD

### Colors:

16.7 million colors

### Contrast Ratio:

1000:1 typ.

### Brightness:

280 cd/m<sup>2</sup> typ.

### Viewing Angle:

Horizontal: 178°  
Vertical: 178°

### Response Time:

18ms.

### Resolution:

640 x 350  
640 x 480  
800 x 600  
1024 x 768  
1280 x 1024

### Display Area:

17" Diagonal

### Horizontal Frequency:


31.5 to 80 KHz

### Vertical Frequency:

56 to 75 Hz.

## MODEL NUMBER

RMM-607(X)(X)

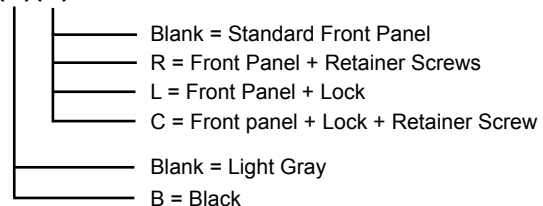

Contact us about other options and our additional rack mount products.



Tel: 408-928-1480  
web:www.recortec.com  
1650 Berryessa Road

**RECORTEC, INC.**  
**1-800-729-7654**

Fax: 408-928-1489  
email:sales@recortec.com  
San Jose, CA 95133