


19" TFT RACK MOUNT MONITOR (8U)

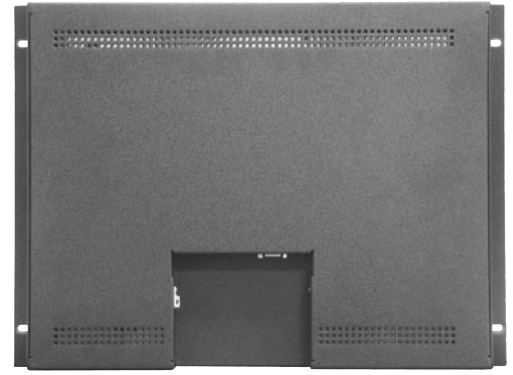

- 19" TFT LCD display (1280 x 1024 resolution) in only 8U (14.0") of rack space.
- Removable rack mounting brackets allow for additional mounting options.
- Housed in aluminum construction with a durable powder coat finish.
- Controls mounted on side of monitor for a clean appearance.
- Choice of light gray or black paint colors at no extra charge.
- Optional Lexan™ (L) or 5 wire resistive touchscreen (T).

GENERAL SPECIFICATIONS

Dimensions:

19.0" (W) x 14.0" (H) x 1.7" (D)
1.7" (D) = .75" in front of mounting rails
.95" behind mounting rails.

Weight:

11 lbs

Power:

110 - 240 VAC, 50/60 Hz.
60 Watts max.

On-Screen Controls:

Brightness, Contrast, Horizontal & Vertical
Position, Auto Adjust, OSD H & V Position, Input Select
Color Temp., Reset.

Plug & Play:

DDC1 and DDC2B

Temperature:

Operating: 0°C to 50°C
Storage: -20°C to 60°C

Humidity:

Operating: 10 to 90% RH (max)

Input Signal (VGA):

R.G.B. analog video, TTL H & V sync.

Input Signal (Digital):

DVI-D (TMDS).

Input Connectors:

Analog: 15-pin mini D-Sub.
Digital: 24 pin DVI-D.

Colors Available:

Light Gray or Black (B).

DISPLAY SPECIFICATIONS

Display Type:

Active matrix TFT LCD

Display area:

19" Diagonal.

Colors Displayed:

16.7 million colors.

Contrast Ratio:

800:1 typ.

Brightness:

270 cd/m² typ.

Viewing Angle:

Horizontal: 178°
Vertical: 178°

Response Time:

18ms Typ.

Resolution:

VGA up to 1280 x 1024.

Horizontal Frequency:

31 to 80 KHz.

Vertical Frequency:

55 to 76 Hz.


Screen Protection:

Optional Lexan™ (L) or
5 Wire Resistive
Touchscreen (T).

Specifications subject to change without notice.

MODEL NUMBER

RMM-909(X)(X)

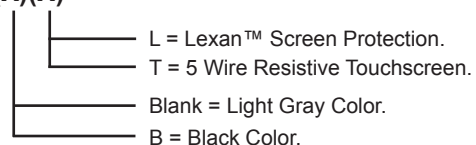

Contact us about other options and our additional rack mount products.



www.recortec.com

Tel: 408-928-1480

Fax: 408-729-3661

RECORTEC, INC.

1-800-729-7654

sales@recortec.com

1620 Berryessa Road

San Jose, CA 95133